
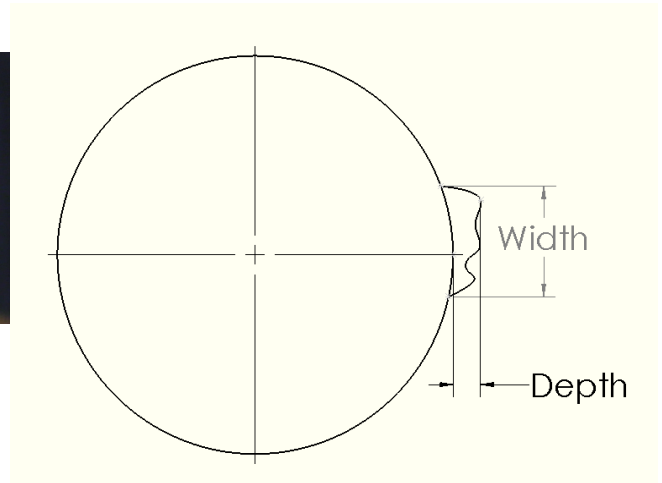


Foreign Material/Inclusions:

Foreign material accounts for any contamination present or any indentation left by the removal of a contaminant.

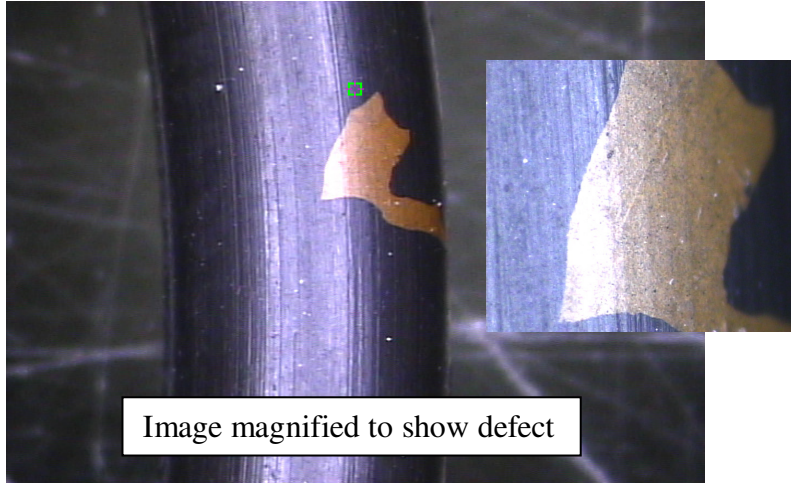

Specification	Max Allowable Contaminant (or Indentation) Width (inches)**	Max Allowable Contaminant (or Indentation) Depth (inches)**
AS708*	0	0
ISO 3601-3 CS	.0051 (indentation after removal)	.0031
AS871	.003 (indentation after removal)	.002 (indentation after removal)
ISO 3601-3 S, DIN 3771 S	.0059	.0031
ISO 3601-3 N, DIN 3771 N	.0236	.0031
MIL-STD-413C	0	0
RMA OR-1 A	0	0
RMA OR-1 B	.005	.003

*No tool marks or defects discernable to the naked eye are permitted

Data above shows maximum allowable Width/Depth of Contaminant/Foreign Material/Indentation assuming an O-ring cross sectional diameter **between 0 and .1 inches