

ISO 3601 Metric Size O-Rings

Quick Reference Chart



Standard O-Rings

ISO 3601 Simplified Reference: ISO 3601 is the SAE Aerospace Size Standard for o-rings. The standard purpose is to specify inside diameters, cross-sections, tolerances, and size identification (dash numbers) for o-rings. Apple Rubber catalog numbers are identical to the ISO 3601 number system. All sizes are listed by ascending inside diameter (I.D.) in fractional and decimal sizes.

How to order

Apple Rubber o-rings are specified by three characteristics: size, hardness, and material.

Size: Standards are specified by their ISO 3601 dash number. O-Ring size is defined by inside diameter and cross-section (width) and is listed in both fractional and decimal dimensions with tolerances. The standards range in I.D.'s from .74 mm to 658.88 mm and cross sections (widths) from 1.02 mm to 6.99 mm. Although we only include the ISO 3601 standard sizes in this brochure, Apple Rubber has a vast inventory of non-standard and metric sizes. Visit our website at applerubber.com and use the O-Ring Size Search Tool to view our inventory.

Hardness: This is specified by a two-digit Shore A durometer number, ranging from 20 (soft) to 90 (hard), depending on the type of elastomer. Our standard durometer is 70 Shore A, except for Viton™ which is 75 Shore A. Standard durometer tolerance is ± 5 .

Material: Our standard range of materials is designated by a two-letter abbreviation for each elastomer. See the Materials table on the next page for designations and further discussions of materials.

PROVIDE THE FOLLOWING WHEN ORDERING


- Quantity of o-rings
- Size by ISO 3601 dash number, or I.D. and C.S., if ordering a non-standard
- Material by hardness and two-digit material abbreviation

EXAMPLES:

Standard O-Ring – If ordering 10,000 pieces of an ISO 3601-110 in 70 durometer Silicone your order would read: 10,000 ISO 3601-110 70SL

Non-Standard – If ordering 25,000 pieces with an internal diameter of 3.00 mm and a cross section of 1.00 mm 70 durometer Buna-N your order would read: 25,000 3.0 mm I.D. x 1.00 mm C.S. 70 BN

Flash for standard sizes is .13 mm thickness by .08 mm extension.

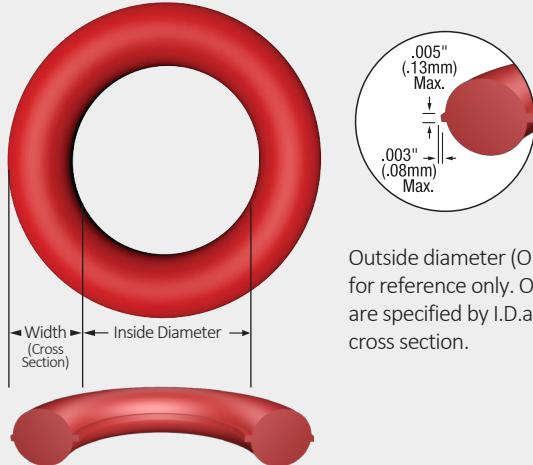

Outside diameter (O.D.) is for reference only. O-Rings are specified by I.D. and cross section.

TO PLACE ORDERS OR QUOTATIONS

Phone: (716) 684-6560 Fax: (716) 684-8302 E-mail: info@applerubber.com
Online: applerubber.com. For complete list of o-ring seal sizes, please use the O-Ring Size Search Tool online at applerubber.com.

Seal Types and Gland Design

O-Ring Gland Design for Dynamic Seals

O-Ring Cross Section	Gland Depth	Squeeze		Diametrical Clearance Max.	Groove Width. $\pm .13$			Groove Radius	Eccentricity Max.
		Millimeter	%		No Backup Rings	One Backup Ring	Two Backup Rings		
1.02	.79/.84	.10/.30	11-28	0.10	1.60	—	—	.013-0.20	0.05
1.27	.99/1.04	.15/.36	13-26	0.10	1.85	—	—	.013-0.20	0.05
1.52	1.19/1.24	.20/.41	14-25	0.10	2.13	—	—	.013-0.20	0.05
1.78	1.40/1.45	.25/.46	15-25	0.10	2.41	3.81	5.28	.013-0.38	0.05
2.62	2.21/2.29	.25/.48	10-18	0.13	3.68	4.75	6.32	.013-0.51	0.08
3.53	3.02/3.12	.30/.06	9-17	0.15	4.70	5.64	7.65	.013-0.76	0.10
5.33	4.65/4.78	.43/.81	8.5-15	0.15	7.24	8.59	10.87	.013-1.27	0.15
6.99	5.94/6.10	.074/1.19	10.5-17	0.18	9.52	11.18	14.71	.013-1.52	0.20

O-Ring Gland Design for Static Seals

O-Ring Cross Section	Gland Depth		Squeeze				Diametrical Clearance Max.	Groove Width. $\pm .13$			Groove Radius	Eccentricity Max.
			Radial >○<		Axial ▲▼			No Backup Rings	One Backup Ring	Two Backup Rings		
	Radial	Axial	Millimeter	%	Millimeter	%						
1.02	.69-.76	.69-.76	.18-.41	19-37	.18-.41	19-37	0.08	1.52	—	—	.013-0.20	0.05
1.27	.89-.99	.86-.97	.20-.46	17-34	.23-.48	19-36	0.10	1.91	—	—	.013-0.20	0.05
1.52	1.07-1.19	1.07-1.17	.25-.53	18-33	.28-.53	19-33	0.10	2.29	—	—	.013-0.20	0.05
1.78	1.27-1.40	1.24-1.37	.30-.58	18-32	.33-.61	19-33	0.10	2.41	3.81	5.28	.013-0.38	0.05
2.62	2.03-2.18	1.91-2.06	.36-.66	14-25	.48-.79	19-29	0.13	3.56	4.62	6.20	.013-0.51	0.08
3.53	2.79-2.95	2.54-2.74	.48-.84	14-23	.69-1.09	20-30	0.15	4.57	5.51	7.52	.013-0.76	0.10
5.33	4.32-4.47	3.94-4.19	.74-1.14	14-21	1.02-1.52	20-28	0.15	7.11	8.46	10.74	.013-1.27	0.15
6.99	5.72-5.97	5.21-5.42	.86-1.42	13-20	1.37-1.93	20-27	0.18	9.40	11.05	14.58	.013-1.52	0.20

General Applications

Apple O-Rings are available in a choice of six basic materials, each in a range of optional durometer (Shore A) hardnesses. Other materials available upon request.

Nitrile/Buna-N: In the Nitrile family, you will find excellent compounds for fuel and oil applications. For better ozone resistance, try Hydrogenated Nitrile (HNBR).

Ethylene-Propylene: In the Ethylene-Propylene family, you will find compounds that are used extensively for outdoor, weather-resistant uses and water applications. The first choice for low torque drive belts.

Silicone: In the Silicone family, you will find compounds that are excellent as static seals in extreme temperature conditions.

Neoprene®: In the Neoprene family, you will find compounds which are the superior sealing materials for the refrigeration industry featuring resistance to ammonia and Freon®.

Fluorocarbon: In the Fluorocarbon family, you will find compounds that make up the preferred seals for aircraft engines, automotive fuel handling systems and hard vacuum service.

Fluorosilicone: In the Fluorosilicone family, you will find compounds that make up seals that are unparalleled for aerospace fuel systems and auto fuel emission control systems.

All materials are compounded under stringent quality control for uniformity of physical property and meet or exceed military/aerospace, FDA/Medical, UL, automotive, and industrial specifications.

To Determine Material:

1. Determine end use:
static (stationary) or dynamic (moving).
2. List the substance that the seal will be exposed to and check o-ring material resistances in Chemical Compatibility Table(s) listed in the Apple Seal Design Guide.
3. List ALL factors of seal application and check material performance.
 - A. Pressure: determines material hardness and selection.
 - B. Heat/Cold: check material temperature range(s).
 - C. Friction: determines material hardness and selection.
 - D. Permeability: important for pneumatic and vacuum applications.
4. Medical applications: make sure an Apple representative is aware if medical grade materials are required.

The most commonly used durometer is 70. Although other durometers are offered, availability may be limited due to processing or shrinkage factors.

Materials	Apple Material Designation	Durometers (Shore A)	Temperature Range* (Dry Heat Only)	Description
Nitrile/Buna-N (NBR)	BN	40 thru 90	-40 to +257° F -40 to +125° C	Presently the seal industry's most widely used elastomer. Nitrile combines excellent resistance to petroleum-based oils and fuels, silicone greases, hydraulic fluids, water and alcohols. It has a good balance of such desirable working properties as low compression set, high tensile strength and high abrasion resistance.
Ethylene-Propylene (EPM/EPDM)	EP	40 thru 90	-40 to +275° F -40 to +135° C	Features good resistance to such polar solvents as ketones (MEK & Acetone). EPM/EPDM is also highly recommended for effective resistance to steam (to 400° F), hot water, silicone oils and greases, dilute acids and alkalies, alcohols and automotive brake fluids. Properly compounded, Ethylene Propylene can provide extended temperature range of -76°F to +350°F.
Silicone (MQ; PMQ; VMQ; PVMQ)	SL	25 thru 80	-85 to +400° F -65 to +230° C	Especially resistant to high, dry heat in primarily static applications. Silicones are fungus resistant, odorless, tasteless, non-toxic elastomers and possess high-resistance to the aging effects of both sunlight and ozone attack.
Neoprene® (Chloroprene) (CR)	CR	40 thru 90	-40 to +250° F -40 to +121° C	An early developed, oil-resistant substitute for natural rubber, Neoprene features moderate resistance to petroleum oils, good resistance to ozone, sunlight and oxygen aging, relatively low compression set, good resilience, reasonable cost, and high resistance to attack by Freon® and Ammonia.
Fluorocarbon (Viton®) (Fluorel®) (FKM)	VT	55 thru 95	-13 to +446° F -25 to +230° C	Combines high-temperature toughness with wide chemical agent compatibility, Fluorocarbon compounds feature excellent resistance to petroleum products and solvents and good high-temperature compression set characteristics.
Fluorosilicone (FVMQ)	FS	40 thru 80	-75 to +400° F -60 to +200° C	Combines the good high and low temperature stability of Silicones with the fuel, oil and solvent resistance of fluorocarbons. FS compounds feature good compression set and resilience properties. FS compounds are suitable for exposure to air, sunlight, ozone, chlorinated and aromatic hydrocarbons.

*The temperatures listed are general operating range.

ISO No.	I.D.	Width	I.D. Tol.	W. Tol.
-001	0.74	1.02	± 0.100	± 0.080
-002	1.07	1.27	± 0.100	± 0.080
-003	1.42	1.52	± 0.100	± 0.080
-004	1.78	1.78	± 0.130	± 0.080
-005	2.57	1.78	± 0.130	± 0.080
-006	2.90	1.78	± 0.130	± 0.080
-007	3.68	1.78	± 0.130	± 0.080
-008	4.47	1.78	± 0.130	± 0.080
-009	5.28	1.78	± 0.130	± 0.080
-010	6.07	1.78	± 0.130	± 0.080
-011	7.65	1.78	± 0.130	± 0.080
-012	9.25	1.78	± 0.130	± 0.080
-013	10.82	1.78	± 0.130	± 0.080
-014	12.42	1.78	± 0.130	± 0.080
-015	14.00	1.78	± 0.180	± 0.080
-016	15.60	1.78	± 0.230	± 0.080
-017	17.17	1.78	± 0.230	± 0.080
-018	18.77	1.78	± 0.230	± 0.080
-019	20.35	1.78	± 0.230	± 0.080
-020	21.95	1.78	± 0.230	± 0.080
-021	23.52	1.78	± 0.230	± 0.080
-022	25.12	1.78	± 0.250	± 0.080
-023	26.70	1.78	± 0.250	± 0.080
-024	28.30	1.78	± 0.250	± 0.080
-025	29.87	1.78	± 0.280	± 0.080
-026	31.47	1.78	± 0.280	± 0.080
-027	33.05	1.78	± 0.280	± 0.080
-028	34.65	1.78	± 0.330	± 0.080
-029	37.82	1.78	± 0.330	± 0.080
-030	41.00	1.78	± 0.330	± 0.080
-031	44.17	1.78	± 0.380	± 0.080
-032	47.35	1.78	± 0.380	± 0.080
-033	50.52	1.78	± 0.460	± 0.080
-034	53.70	1.78	± 0.460	± 0.080
-035	56.87	1.78	± 0.460	± 0.080
-036	60.05	1.78	± 0.460	± 0.080
-037	63.22	1.78	± 0.460	± 0.080
-038	66.40	1.78	± 0.510	± 0.080
-039	69.57	1.78	± 0.510	± 0.080
-040	72.75	1.78	± 0.510	± 0.080
-041	75.92	1.78	± 0.610	± 0.080
-042	82.27	1.78	± 0.610	± 0.080
-043	88.62	1.78	± 0.610	± 0.080
-044	94.97	1.78	± 0.690	± 0.080
-045	101.32	1.78	± 0.690	± 0.080
-046	107.67	1.78	± 0.760	± 0.080
-047	114.02	1.78	± 0.760	± 0.080
-048	120.37	1.78	± 0.760	± 0.080
-049	126.72	1.78	± 0.940	± 0.080
-050	133.07	1.78	± 0.940	± 0.080
-102	1.24	2.62	± 0.130	± 0.080
-103	2.06	2.62	± 0.130	± 0.080
-104	2.84	2.62	± 0.130	± 0.080
-105	3.63	2.62	± 0.130	± 0.080
-106	4.42	2.62	± 0.130	± 0.080

ISO No.	I.D.	Width	I.D. Tol.	W. Tol.
-107	5.23	2.62	± 0.130	± 0.080
-108	6.02	2.62	± 0.130	± 0.080
-109	7.59	2.62	± 0.130	± 0.080
-110	9.19	2.62	± 0.130	± 0.080
-111	10.77	2.62	± 0.130	± 0.080
-112	12.37	2.62	± 0.130	± 0.080
-113	13.94	2.62	± 0.180	± 0.080
-114	15.54	2.62	± 0.230	± 0.080
-115	17.12	2.62	± 0.230	± 0.080
-116	18.72	2.62	± 0.230	± 0.080
-117	20.29	2.62	± 0.250	± 0.080
-118	21.89	2.62	± 0.250	± 0.080
-119	23.47	2.62	± 0.250	± 0.080
-120	25.07	2.62	± 0.250	± 0.080
-121	26.64	2.62	± 0.250	± 0.080
-122	28.24	2.62	± 0.250	± 0.080
-123	29.82	2.62	± 0.300	± 0.080
-124	31.42	2.62	± 0.300	± 0.080
-125	32.99	2.62	± 0.300	± 0.080
-126	34.59	2.62	± 0.300	± 0.080
-127	36.17	2.62	± 0.300	± 0.080
-128	37.77	2.62	± 0.300	± 0.080
-129	39.34	2.62	± 0.380	± 0.080
-130	40.94	2.62	± 0.380	± 0.080
-131	42.52	2.62	± 0.380	± 0.080
-132	44.12	2.62	± 0.380	± 0.080
-133	45.69	2.62	± 0.380	± 0.080
-134	47.29	2.62	± 0.380	± 0.080
-135	48.90	2.62	± 0.430	± 0.080
-136	50.47	2.62	± 0.430	± 0.080
-137	52.07	2.62	± 0.430	± 0.080
-138	53.64	2.62	± 0.430	± 0.080
-139	55.25	2.62	± 0.430	± 0.080
-140	56.82	2.62	± 0.430	± 0.080
-141	58.42	2.62	± 0.510	± 0.080
-142	59.99	2.62	± 0.510	± 0.080
-143	61.60	2.62	± 0.510	± 0.080
-144	63.17	2.62	± 0.510	± 0.080
-145	64.77	2.62	± 0.510	± 0.080
-146	66.34	2.62	± 0.510	± 0.080
-147	67.95	2.62	± 0.560	± 0.080
-148	69.52	2.62	± 0.560	± 0.080
-149	71.12	2.62	± 0.560	± 0.080
-150	72.69	2.62	± 0.560	± 0.080
-151	75.87	2.62	± 0.610	± 0.080
-152	82.22	2.62	± 0.610	± 0.080
-153	88.57	2.62	± 0.610	± 0.080
-154	94.92	2.62	± 0.710	± 0.080
-155	101.27	2.62	± 0.710	± 0.080
-156	107.62	2.62	± 0.760	± 0.080
-157	113.97	2.62	± 0.760	± 0.080
-158	120.32	2.62	± 0.760	± 0.080
-159	126.67	2.62	± 0.890	± 0.080
-160	133.02	2.62	± 0.890	± 0.080
-161	139.37	2.62	± 0.890	± 0.080


ISO No.	I.D.	Width	I.D. Tol.	W. Tol.
-162	145.72	2.62	± 0.890	± 0.080
-163	152.07	2.62	± 0.890	± 0.080
-164	158.42	2.62	± 1.020	± 0.080
-165	164.77	2.62	± 1.020	± 0.080
-166	171.12	2.62	± 1.020	± 0.080
-167	177.47	2.62	± 1.020	± 0.080
-168	183.82	2.62	± 1.140	± 0.080
-169	190.17	2.62	± 1.140	± 0.080
-170	196.52	2.62	± 1.140	± 0.080
-171	202.87	2.62	± 1.140	± 0.080
-172	209.22	2.62	± 1.270	± 0.080
-173	215.57	2.62	± 1.270	± 0.080
-174	221.92	2.62	± 1.270	± 0.080
-175	228.27	2.62	± 1.270	± 0.080
-176	234.62	2.62	± 1.400	± 0.080
-177	240.97	2.62	± 1.400	± 0.080
-178	247.32	2.62	± 1.400	± 0.080
-201	4.34	3.53	± 0.130	± 0.100
-202	5.94	3.53	± 0.130	± 0.100
-203	7.52	3.53	± 0.130	± 0.100
-204	9.12	3.53	± 0.130	± 0.100
-205	10.69	3.53	± 0.130	± 0.100
-206	12.29	3.53	± 0.130	± 0.100
-207	13.87	3.53	± 0.180	± 0.100
-208	15.47	3.53	± 0.230	± 0.100
-209	17.04	3.53	± 0.230	± 0.100
-210	18.64	3.53	± 0.250	± 0.100
-211	20.22	3.53	± 0.250	± 0.100
-212	21.82	3.53	± 0.250	± 0.100
-213	23.39	3.53	± 0.250	± 0.100
-214	24.99	3.53	± 0.250	± 0.100
-215	26.57	3.53	± 0.250	± 0.100
-216	28.17	3.53	± 0.300	± 0.100
-217	29.74	3.53	± 0.300	± 0.100
-218	31.34	3.53	± 0.300	± 0.100
-219	32.92	3.53	± 0.300	± 0.100
-220	34.52	3.53	± 0.300	± 0.100
-221	36.09	3.53	± 0.300	± 0.100
-222	37.69	3.53	± 0.380	± 0.100
-223	40.87	3.53	± 0.380	± 0.100
-224	44.04	3.53	± 0.380	± 0.100
-225	47.22	3.53	± 0.460	± 0.100
-226	50.39	3.53	± 0.460	± 0.100
-227	53.57	3.53	± 0.460	± 0.100
-228	56.74	3.53	± 0.510	± 0.100
-229	59.92	3.53	± 0.510	± 0.100
-230	63.09	3.53	± 0.510	± 0.100
-231	66.27	3.53	± 0.510	± 0.100
-232	69.44	3.53	± 0.610	± 0.100
-233	72.62	3.53	± 0.610	± 0.100
-234	75.79	3.53	± 0.610	± 0.100
-235	78.97	3.53	± 0.610	± 0.100
-236	82.14	3.53	± 0.610	± 0.100
-237	85.32	3.53	± 0.610	± 0.100
-238	88.49	3.53	± 0.610	± 0.100

ISO No.	I.D.	Width	I.D. Tol.	W. Tol.
-239	91.67	3.53	± 0.710	± 0.100
-240	94.84	3.53	± 0.710	± 0.100
-241	98.02	3.53	± 0.710	± 0.100
-242	101.19	3.53	± 0.710	± 0.100
-243	104.37	3.53	± 0.710	± 0.100
-244	107.54	3.53	± 0.760	± 0.100
-245	110.72	3.53	± 0.760	± 0.100
-246	113.89	3.53	± 0.760	± 0.100
-247	117.07	3.53	± 0.760	± 0.100
-248	120.24	3.53	± 0.760	± 0.100
-249	123.42	3.53	± 0.890	± 0.100
-250	126.59	3.53	± 0.890	± 0.100
-251	129.77	3.53	± 0.890	± 0.100
-252	132.94	3.53	± 0.890	± 0.100
-253	136.12	3.53	± 0.890	± 0.100
-254	139.29	3.53	± 0.890	± 0.100
-255	142.47	3.53	± 0.890	± 0.100
-256	145.64	3.53	± 0.890	± 0.100
-257	148.82	3.53	± 0.890	± 0.100
-258	151.99	3.53	± 0.890	± 0.100
-259	158.34	3.53	± 1.020	± 0.100
-260	164.69	3.53	± 1.020	± 0.100
-261	171.04	3.53	± 1.020	± 0.100
-262	177.39	3.53	± 1.020	± 0.100
-263	183.74	3.53	± 1.140	± 0.100
-264	190.09	3.53	± 1.140	± 0.100
-265	196.44	3.53	± 1.140	± 0.100
-266	202.79	3.53	± 1.140	± 0.100
-267	209.14	3.53	± 1.270	± 0.100
-268	215.49	3.53	± 1.270	± 0.100
-269	221.84	3.53	± 1.270	± 0.100
-270	228.19	3.53	± 1.270	± 0.100
-271	234.54	3.53	± 1.400	± 0.100
-272	240.89	3.53	± 1.400	± 0.100
-273	247.24	3.53	± 1.400	± 0.100
-274	253.59	3.53	± 1.400	± 0.100
-275	266.29	3.53	± 1.400	± 0.100
-276	278.99	3.53	± 1.650	± 0.100
-277	291.69	3.53	± 1.650	± 0.100
-278	304.39	3.53	± 1.650	± 0.100
-279	329.79	3.53	± 1.650	± 0.100
-280	355.19	3.53	± 1.650	± 0.100
-281	380.59	3.53	± 1.650	± 0.100
-282	405.26	3.53	± 1.910	± 0.100
-283	430.66	3.53	± 2.030	± 0.100
-284	456.06	3.53	± 2.160	± 0.100
-309	10.46	5.33	± 0.130	± 0.130
-310	12.07	5.33	± 0.130	± 0.130
-311	13.64	5.33	± 0.180	± 0.130
-312	15.24	5.33	± 0.230	± 0.130
-313	16.81	5.33	± 0.230	± 0.130
-314	18.42	5.33	± 0.250	± 0.130
-315	19.99	5.33	± 0.250	± 0.130
-316	21.59	5.33	± 0.250	± 0.130
-317	23.16	5.33	± 0.250	± 0.130

ISO No.	I.D.	Width	I.D. Tol.	W. Tol.
-318	24.77	5.33	± 0.250	± 0.130
-319	26.34	5.33	± 0.250	± 0.130
-320	27.94	5.33	± 0.300	± 0.130
-321	29.51	5.33	± 0.300	± 0.130
-322	31.12	5.33	± 0.300	± 0.130
-323	32.69	5.33	± 0.300	± 0.130
-324	34.29	5.33	± 0.300	± 0.130
-325	37.47	5.33	± 0.380	± 0.130
-326	40.64	5.33	± 0.380	± 0.130
-327	43.82	5.33	± 0.380	± 0.130
-328	46.99	5.33	± 0.380	± 0.130
-329	50.17	5.33	± 0.460	± 0.130
-330	53.34	5.33	± 0.460	± 0.130
-331	56.52	5.33	± 0.460	± 0.130
-332	59.69	5.33	± 0.460	± 0.130
-333	62.87	5.33	± 0.510	± 0.130
-334	66.04	5.33	± 0.510	± 0.130
-335	69.22	5.33	± 0.510	± 0.130
-336	72.39	5.33	± 0.510	± 0.130
-337	75.57	5.33	± 0.610	± 0.130
-338	78.74	5.33	± 0.610	± 0.130
-339	81.92	5.33	± 0.610	± 0.130
-340	85.09	5.33	± 0.610	± 0.130
-341	88.27	5.33	± 0.610	± 0.130
-342	91.44	5.33	± 0.710	± 0.130
-343	94.62	5.33	± 0.710	± 0.130
-344	97.79	5.33	± 0.710	± 0.130
-345	100.97	5.33	± 0.710	± 0.130
-346	104.14	5.33	± 0.710	± 0.130
-347	107.32	5.33	± 0.760	± 0.130
-348	110.49	5.33	± 0.760	± 0.130
-349	113.67	5.33	± 0.760	± 0.130
-350	116.84	5.33	± 0.760	± 0.130
-351	120.02	5.33	± 0.760	± 0.130
-352	123.19	5.33	± 0.760	± 0.130
-353	126.37	5.33	± 0.940	± 0.130
-354	129.54	5.33	± 0.940	± 0.130
-355	132.72	5.33	± 0.940	± 0.130
-356	135.89	5.33	± 0.940	± 0.130
-357	139.07	5.33	± 0.940	± 0.130
-358	142.24	5.33	± 0.940	± 0.130
-359	145.42	5.33	± 0.940	± 0.130
-360	148.59	5.33	± 0.940	± 0.130
-361	151.77	5.33	± 0.940	± 0.130
-362	158.12	5.33	± 1.020	± 0.130
-363	164.47	5.33	± 1.020	± 0.130
-364	170.82	5.33	± 1.020	± 0.130
-365	177.17	5.33	± 1.020	± 0.130
-366	183.52	5.33	± 1.140	± 0.130
-367	189.87	5.33	± 1.140	± 0.130
-368	196.22	5.33	± 1.140	± 0.130
-369	202.57	5.33	± 1.140	± 0.130
-370	208.92	5.33	± 1.270	± 0.130
-371	215.27	5.33	± 1.270	± 0.130
-372	221.62	5.33	± 1.270	± 0.130

ISO No.	I.D.	Width	I.D. Tol.	W. Tol.
-373	227.97	5.33	± 1.270	± 0.130
-374	234.32	5.33	± 1.400	± 0.130
-375	240.67	5.33	± 1.400	± 0.130
-376	247.02	5.33	± 1.400	± 0.130
-377	253.37	5.33	± 1.400	± 0.130
-378	266.07	5.33	± 1.520	± 0.130
-379	278.77	5.33	± 1.520	± 0.130
-380	291.47	5.33	± 1.650	± 0.130
-381	304.17	5.33	± 1.650	± 0.130
-382	329.57	5.33	± 1.650	± 0.130
-383	354.97	5.33	± 1.780	± 0.130
-384	380.37	5.33	± 1.780	± 0.130
-385	405.26	5.33	± 1.910	± 0.130
-386	430.66	5.33	± 2.030	± 0.130
-387	456.06	5.33	± 2.160	± 0.130
-388	481.46	5.33	± 2.290	± 0.130
-389	506.86	5.33	± 2.410	± 0.130
-390	532.26	5.33	± 2.410	± 0.130
-391	557.66	5.33	± 2.540	± 0.130
-392	582.68	5.33	± 2.670	± 0.130
-393	608.08	5.33	± 2.790	± 0.130
-394	633.48	5.33	± 2.920	± 0.130
-395	658.88	5.33	± 3.050	± 0.130
-425	113.67	6.99	± 0.840	± 0.150
-426	116.84	6.99	± 0.840	± 0.150
-427	120.02	6.99	± 0.840	± 0.150
-428	123.19	6.99	± 0.840	± 0.150
-429	126.37	6.99	± 0.940	± 0.150
-430	129.54	6.99	± 0.940	± 0.150
-431	132.72	6.99	± 0.940	± 0.150
-432	135.89	6.99	± 0.940	± 0.150
-433	139.07	6.99	± 0.940	± 0.150
-434	142.24	6.99	± 0.940	± 0.150
-435	145.42	6.99	± 0.940	± 0.150
-436	148.59	6.99	± 0.940	± 0.150
-437	151.77	6.99	± 0.940	± 0.150
-438	158.12	6.99	± 1.020	± 0.150
-439	164.47	6.99	± 1.020	± 0.150
-440	170.82	6.99	± 1.020	± 0.150
-441	177.17	6.99	± 1.020	± 0.150
-442	183.52	6.99	± 1.140	± 0.150
-443	189.87	6.99	± 1.140	± 0.150
-444	196.22	6.99	± 1.140	± 0.150
-445	202.57	6.99	± 1.140	± 0.150
-446	215.27	6.99	± 1.400	± 0.150
-447	227.97	6.99	± 1.400	± 0.150
-448	240.67	6.99	± 1.400	± 0.150
-449	253.37	6.99	± 1.400	± 0.150
-450	266.07	6.99	± 1.520	± 0.150
-451	278.77	6.99	± 1.520	± 0.150
-452	291.47	6.99	± 1.520	± 0.150
-453	304.17	6.99	± 1.520	± 0.150
-454	316.87	6.99	± 1.520	± 0.150
-455	329.57	6.99	± 1.520	± 0.150
-456	342.27	6.99	± 1.780	± 0.150

ISO No.	I.D.	Width	I.D. Tol.	W. Tol.
-457	354.97	6.99	± 1.780	± 0.150
-458	367.67	6.99	± 1.780	± 0.150
-459	380.37	6.99	± 1.780	± 0.150
-460	393.07	6.99	± 1.780	± 0.150
-461	405.26	6.99	± 1.910	± 0.150
-462	417.96	6.99	± 1.910	± 0.150
-463	430.66	6.99	± 2.030	± 0.150
-464	443.36	6.99	± 2.160	± 0.150
-465	456.06	6.99	± 2.160	± 0.150
-466	468.76	6.99	± 2.160	± 0.150
-467	481.46	6.99	± 2.290	± 0.150
-468	494.16	6.99	± 2.290	± 0.150
-469	506.86	6.99	± 2.410	± 0.150
-470	532.26	6.99	± 2.410	± 0.150
-471	557.66	6.99	± 2.540	± 0.150
-472	582.68	6.99	± 2.670	± 0.150
-473	608.08	6.99	± 2.790	± 0.150
-474	633.48	6.99	± 2.920	± 0.150
-475	658.88	6.99	± 3.050	± 0.150

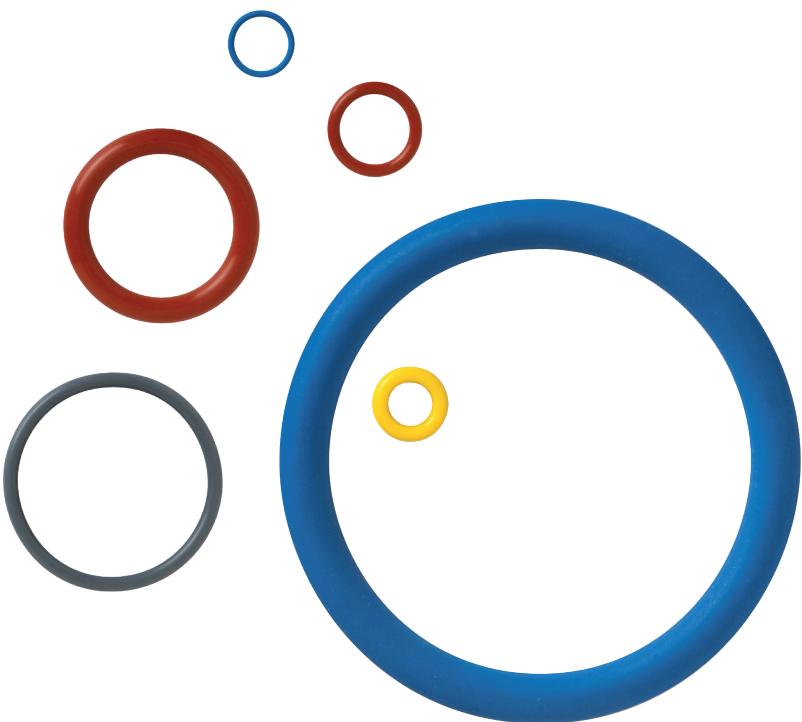

One Source for All Your Sealing Needs

Apple Rubber stocks AS568 and ISO 3601 standard sizes, most common metric sizes, plus a wide variety of non-standard o-ring sizes. Our materials meet mil-spec, UL, medical and automotive specifications.

Apple Rubber offers expert custom molding for non-standard rubber products. With in-house tooling, we save more time and resources compared to offshore operations. We offer expertise at any level of production, from prototype to high volume tooling.

When you call Apple Rubber, you deal directly with the manufacturer. Our experienced staff provides complete and comprehensive service to help you get the correct product for your application.

Full Line of Quality Apple Rubber Products

Products:

O-Rings — standards, metrics,
MicrOrings®, MacrOrings®
LSR (Liquid Silicone Rubber)
Composite seals
(rubber bonded to plastic or metal)
Custom-molded seals and shapes
Medical seals
Thermobonded seals
FilterSeal™
Military specs
Standard and exotic materials

Services:

Design capabilities
Prototyping and production runs
Full quality-control laboratory
Class 10,000 (7) Cleanroom
ISO 9001 / AS 9100 Certifications
ITAR Registered




310 Erie Street
Lancaster, New York 14086
P (716) 684-6560
F (716) 684-8302
info@apperubber.com

For more information or
to order call 1-800-828-7745
or visit applerubber.com.



© 2022 Apple Rubber Products, Inc.

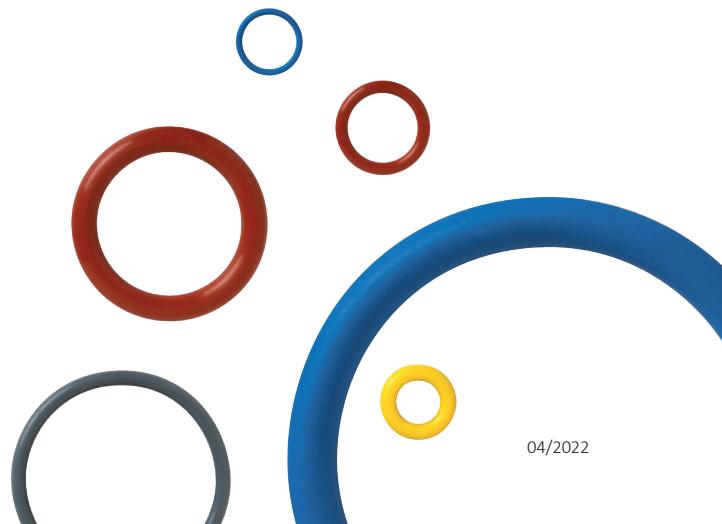

04/2022